


50hz Power Pallet wiring configuration and voltages

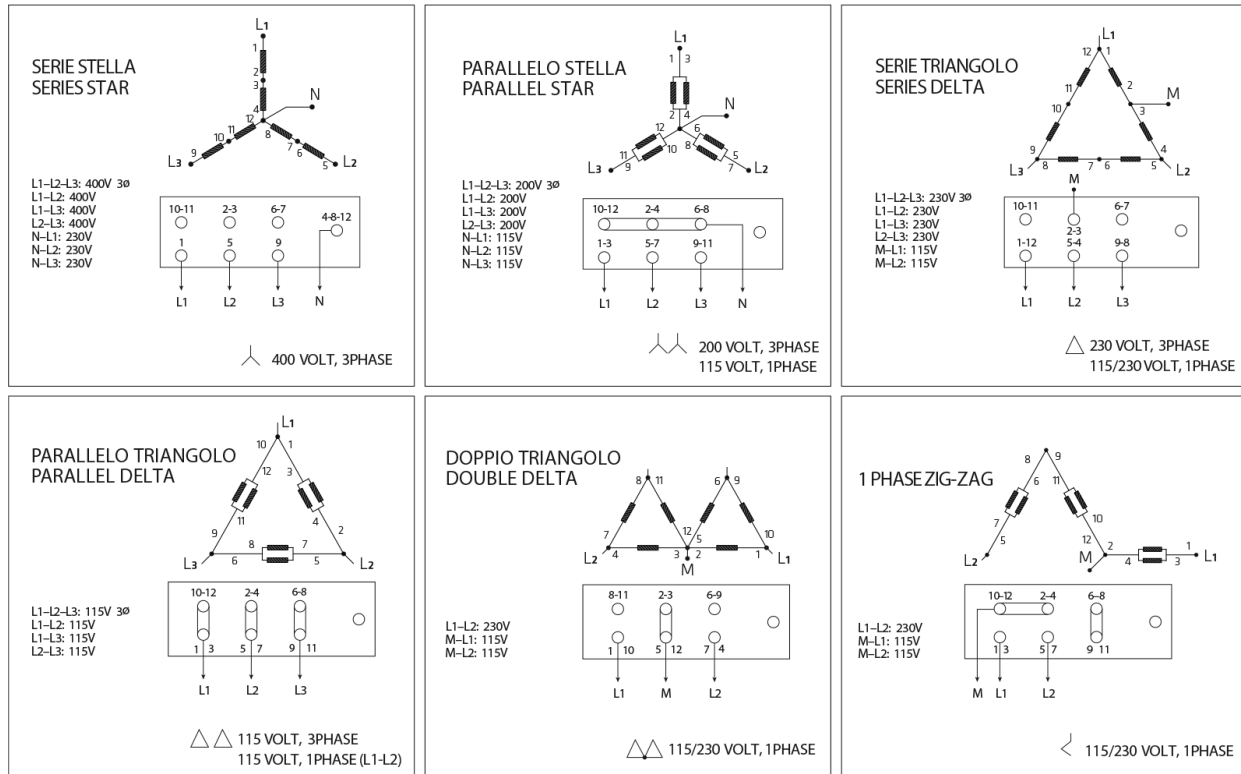

50hz- configuration and terminals	Voltage options				
-----------------------------------	-----------------	--	--	--	--

Configuration	Terminal	Option 1	Option 2	Option 3	Option 4
Series Star	L - L	380V	400V	415V	440V
	L - N	220V	230V	240V	254V
Parallel Star	L - L	190V	200V	208V	220V
	L - N	110V	115V	120V	127V
Series Delta	L - L	220V	115V	120V	127V
	L - M	110V	115V	120V	127V
Parallel Delta	L - L	110V	115V	120V	127V
Zig-Zag	L - L	330V	346V	360V	380V
	L - M	191V	200V	208V	220V
1-Phase Parallel Zig-Zag	L - L	220V	230V	240V	254V
	L - M	110V	115V	120V	127V
1- Phase Double Delta	L - L	220V	230V	240V	254V
	L - M	110V	115V	120V	127V