

ALL POWER LABS

personal scale power





ALL Power Labs is the global leader in small-scale gasification. We make biomass gasifiers that are **ready for everyday use and serve real world distributed energy needs.**

Our project began in 2008 with the open source Gasifier Experimenters Kits (GEK) for research and education. It has since evolved into the Power Pallet - **a fully automated solution for biomass power generation.**

Today you can find over 400 of our systems, in over 40 countries, supporting research in over 50 universities.

INDEX	
Power Pallet™	Page 4-9
Use Cases, Benefits & ROI	Page 10-11
Research Equipment & Instrumentation	Page 12-13
Authorized Representatives & ALL Power Labs	Page 14-15





The Full Solution

The Power Pallet is a **complete biomass power generation solution** that converts woody biomass to electricity, heat, or PTO shaft power. It is a compact and fully automated system delivered at the breakthrough price of \$1 to \$2 per watt.


Power Pallets are available in 10 kW and 20 kW sizes using Kubota and GM industrial engines, paired with Mecc Alte AVR generators. The resulting combination delivers stable electricity from biomass at 120/208/240 VAC, 60 Hz or 50 Hz, in single, split, or three phase.

Why It's Different

The Power Pallet is distinguished by its ease of use, compact size, and affordable price. It is a solution that delivers the **hands-off operation** expected from modern power generation equipment.

These advantages are the result of breakthroughs in electronic control and waste heat recycling. An onboard microcontroller provides the expertise usually required from a trained operator. A multi-stage gasification architecture, combined with an innovative gasifier-engine thermal integration, significantly improves tar conversion and fuel flexibility.

The result is a compact and technically advanced gasification solution that is **practical for everyday use**.

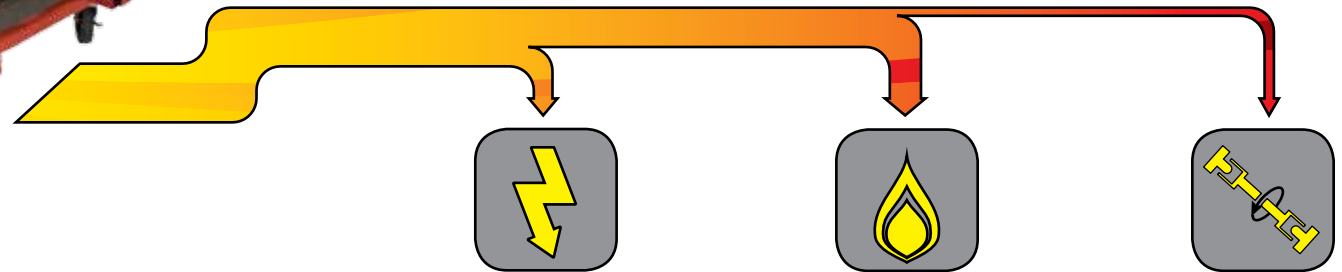

Power Pallet™ Features

The **Power Pallet** consists of a multi-stage gasifier, spark fired industrial engine, generator head, and Process Control Unit (PCU). The PCU monitors and responds to all internal reactor, engine, and filter conditions, displaying the results on an LCD screen.


The PCU also automatically adjusts the syngas/air mixture via a wide band Bosch oxygen sensor and shakes the ash grate when required by reactor conditions.

PCU: Automated control system, oxygen sensor, syngas/air adjustment, and ash grate shaker.

Engine: The Power Pallet is powered by:

- 10kW - Kubota 3-cyl 962cc
- 20kW - GM 4cyl 3.0L

Genhead: 10kW or 20kW Mecc Alte industrial generator with automatic voltage regulation (AVR). Twelve wire genhead is reconfigurable on-site to 120/208/240 VAC. 50Hz or 60Hz in single, split, or 3-phase.

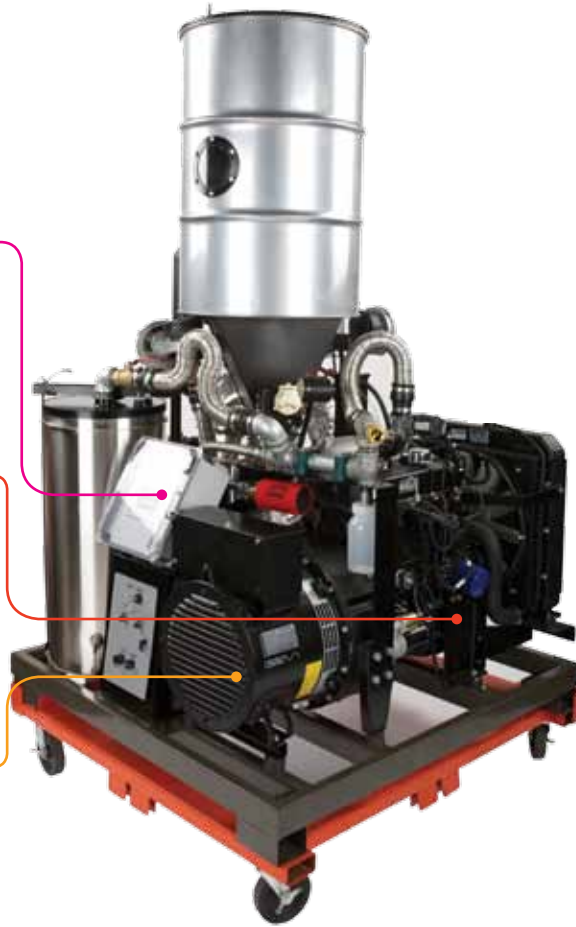

Hopper: Steel hopper holds up to 10 hours of fuel.

Flare: Premixed swirl burner ensures clean start-up.

TOTTI: Waste heat recovery and recirculation system for improved tar cracking and moist fuel tolerance.

Gas Filter: Packed bed filter with washable foam elements.

GEK Gasifier: Compact multi-stage downdraft gasifier system that produces clean gas

Skid Base: All components come mounted to a forklift-ready skid.

POWER PALLET SPECS	10 kW	20 kW
Power Output	1-10 kW	2-20 kW
Biomass Consumption	12 kg / 26 lbs per hour at 10 kW	22 kg / 50 lbs per hour at 20 kW
Fuel Moisture Tolerance	Up to 30%	Up to 30%
Dimensions	1.2m x 1.2m x 1.8m 48" x 48" x 72"	1.2m x 1.3m x 1.8m 51" x 53" x 72"
Weight	499 kg / 1100 lbs	658 kg / 1450 lbs





10kW

Kubota DG 972

Kubota engines have a well earned reputation for high reliability and extreme longevity in a wide variety of applications. Robust performance and compact footprint have made them the engine of choice for small scale industrial, agricultural, and generator applications.

This 962cc 3-cylinder inline gaseous fuel engine is based on the company's acclaimed diesel engines. The new combustion chamber, designed exclusively for the gaseous fuel engine, reduces emissions and the raised compression ratio increases efficiency.



20kW

GM Vortec 3.0 L I-4

The Vortec 3.0 L inline 4-cylinder engine is produced exclusively for industrial and marine applications. It has the longest production history of any GM Powertrain industrial engine, with a well-earned reputation for durability and reliability. The engine comes factory configured for gaseous fuels, with features including:

- Increased compression ratio
- Sintered powder metal exhaust valve seat inserts for enhanced durability
- Nodular iron crankshaft for increased strength and durability

Gasifying **2.5lb (1.2 kg) of biomass**

produces about **2.5 m³ of gas**

which produces about **1.25 HP-hr**

which produces about **1 kWh**


The best fuel for the GEK gasifier is chunky, dry, carbon-dense woody biomass. Fuels such as wood chips, wood chunks, nut shells, and coconut shells ranging in size from 0.5" to 1.5" (10mm to 50mm) are ideal.

FUEL TYPE	WILL IT WORK	HOW WELL	COMMENTS
Hardwood Chips	Yes	Excellent	0.5" to 1.5" (10mm – 50mm) chips
Softwood Chips	Yes	Excellent	0.5" to 1.5" (10mm – 50mm) chips
Nut Shells	Yes	Excellent	Needs least preparation
Coconut Shell	Yes	Excellent	Broken into chunks
Corn Cobs	Yes	Excellent	Broken into chunks
Coffee Grounds	Yes	Fair	Pelletized
Sawdust	Yes	Fair	Pelletized
Rice Husks	No		
Straw	No		
Sugar Cane Bagasse	No		
Corn Stover	No		
Poultry Litter	No		

We do not currently recommend using any of the following fuels with our gasification systems: MSW, tires, medical waste, and coal.



The **Power Pallet** provides reliable, low-cost electricity anywhere biomass is available.

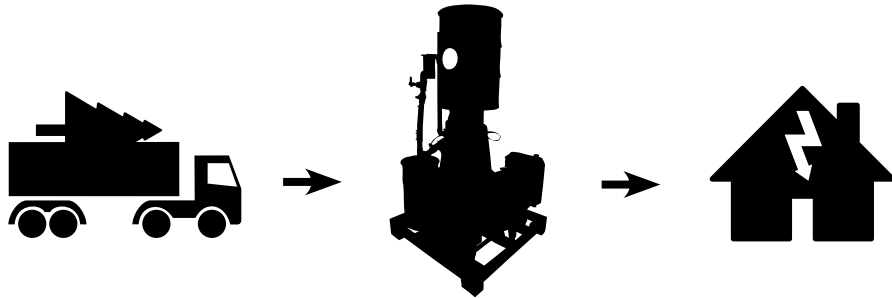

IDEAL USES AND INDUSTRIES

Small Businesses	Forestry
Rural Electrification and Microgrids	Off-Grid Homes
Cell Towers, Radio Station Operators	Pumps, Wells, and Boreholes
Food Processors	Hospitals and Clinics
Commercial Refrigeration	Colleges and Universities
Agriculture	Energy Research

Renewable Clean Energy

Biomass gasification is a clean, carbon neutral method of producing electricity. When gasification is coupled with biochar production, the process becomes carbon negative. Biochar is a highly beneficial soil amendment that can sequester carbon for hundreds to thousands of years.

Affordable

The Power Pallet is one of the most affordable renewable energy systems on the market and delivers attractive ROI without economic subsidies. At just \$1 to \$2 per watt, the capital cost of our system is much less expensive than comparable solar or wind power systems.

Simple to Use and Maintain

The Power Pallet is the first system of its kind that makes gasification easy and user-friendly. We provide a range of training videos and manuals to get you up and running quickly. In addition, our systems are easy to service and can be maintained by most engine or generator mechanics.

Low Cost Electricity

Electricity can be generated from biomass for as low as US \$0.02 per kWh. Generating power with diesel is dramatically more expensive. The cost of obtaining power with solar or wind is often prohibitively expensive without subsidies.

FUEL PRICE COMPARISON

Fuel	Price Range
Diesel	\$0.35 - 0.50 kWh
Biomass	\$0.02 - 0.05 kWh

Low Biomass Demand

The Power Pallet is designed at a scale that allows individual users to easily source biomass fuel locally and sustainably. This feature allows for easy operation and management without dependence on large-scale biomass supply chains, thus enabling operation in remote locations and developing countries.

BIOMASS FUEL CONSUMPTION

	10 kW Engine (@ 75% load)		20 kW Engine (@ 75% load)	
	Biomass Weight	Power Output	Biomass Weight	Power Output
1 Hour	9 kg	7.5 kWh	18 kg	15 kWh
8 Hours	72 kg	60 kWh	144 kg	120 kWh
24 Hours	216 kg	180 kWh	432 kg	360 kWh

Note: 1.2 kg biomass is roughly equal to 1 kWh electrical output

Electricity in Remote Areas

The Power Pallet uses locally available fuel. Unlike diesel, agricultural and forest wastes are readily available and do not require shipping over long distances.



GEK Process Control Unit (PCU)

The PCU is an Arduino-based, open source sensing and control board based on the Atmel AVR ATmega1280 processor. The board is specifically designed for the types of instrumentation and automation requirements of biomass thermal conversion projects.



The board offers a generous number of thermocouple, pressure, analog signal, and frequency inputs, and an array of servo driver and high current PWM capable DC N-channel switched outputs. Networking to other devices is supported via USB, serial, SD card, and CANbus (the networking standard for engine systems).

The PCU is ideal for applications which require integrated instrumentation, datalogging and control.

FEATURES (V3.02)

Processor	Atmel ATmega 1280
Thermocouple Inputs	16 K-type
High/Low Pressure Inputs ($\pm 28''/8''$ H ₂ O)	4/2
FET Outputs (5 A continuous)	8
Analog Inputs (10-bit, Phidgets connectors)	8
Frequency/Counter Input	1
R/C Hobby Servo Outputs	3
Display (4x20 Character)	YES
4 Button Keypad	YES
MicroSD Slot	YES
CANbus Hardware	YES
RS-232 Interface	YES
Prototype/Expansion Area	YES

Research Instrumentation Kit

The Research Instrumentation Kit includes all the basic temperature, pressure, flow, and tar testing accessories needed for gasification research and teaching. The following accessories are compatible with data input ports on the PCU.

Tar Testing	Temperature
Colorimeter to measure tar concentration	(6) K-type 24" point probe thermocouples
Pump, filter, and filter holder for gas sampling	(10) K-type hard probe thermocouples (6", 12", 24")
(100) Filter discs	Fittings and bushings for TC mounting
(100) Vials for tar dissolution	
Flow Rate	Pressure
(2) flow meters (air in, gas out)	Barbs and plumbing to connect PCU to tap points
Proportional servo valve to control gasifier flow rate	Silicone tubing
Silicone tubing, barbs and plumbing	

Portable Infrared Gas Analyzers

The Gasboard 3100 (rack mounted) and Gasboard 3100P (portable) infrared gas analyzers can be used to measure the concentration of up to 6 gases such as: CO, CO₂, CH₄, H₂, C_nH_m, O₂, and calculate the caloric value automatically. These analyzers are typically used for gas analysis in biomass or coal gasification, steel production blast furnaces, and coking.





We believe our personal scale power products are on the cusp of a transformational uptake in the market and on the ground. Waste biomass fuel is nearly everywhere and often free. Rural electrification - whether developing world or otherwise - usually suffers from high cost or high intermittency, with few options that truly replace the usability of the grid or a diesel genset. But it's difficult to demonstrate the technology from our base in Berkeley, California.

That's why ALL Power Labs is growing a network of local market partners, or Authorized Representatives, who understand the profound market potential of our technology and want to be a part of our continued growth.

To learn more about our Authorized Representative Program, please contact: sales@allpowerlabs.org.

ALL Power Labs (APL) is the leading manufacturer of equipment for small-scale biomass gasification and a resource for open-source alternative energy solutions. Through GEK workshops hosted around the world, free online fabrication plans for individuals, and affordable ready-to-run systems, APL makes it easy for you to obtain high-performance solutions in small-scale gasification and pyrolysis.


The ALL Power Labs team is an unusual combination of DIY fabricators and university-trained scientists and engineers. The result is a powerful combination of technical ability and physical know-how for developing innovative energy solutions.





ALL POWER LABS

1010 Murray Street Berkeley, CA 94710 U.S.A.

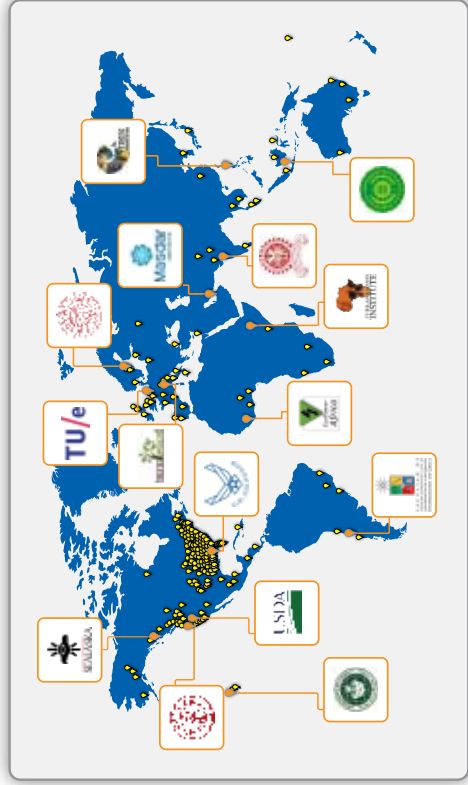

Tel: 510-845-1500 Toll Free: 888-252-5324

sales@allpowerlabs.org www.gekgasifier.com

The GEK Gasifier was developed and is manufactured by All Power Labs in Berkeley, CA. GEK® Power Pallet™, TOTTI™ and BEK™ are trademarks of All Power Labs.

© 2012 All rights reserved.

